


VBA1000-70

10 - 1000MHz 70W Amplifier

- · High reliability proven GaAs design
- Higher performance and efficiency than silicon alternatives
- Lower cost than comparable GaN solutions
- Class A for maximum mismatch drive
- General linear power requirements




Like all our products of the VBA1000 series, it is based on our unique GaAs technology, offering the user the benefits of higher linearity, ruggedness and efficiency than its silicon-based counterparts and lower cost than the more recent GaN additions to the marketplace.



The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer and test chamber requirements.

Performance Chart

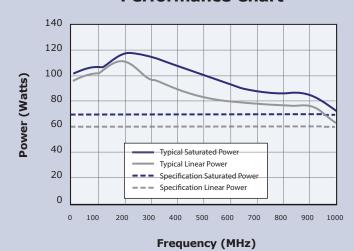

Choose **GaAs Class A** for the ultimate in linearity, ruggedness, efficiency and cost - only from Vectawave.

See overleaf for technical specification

Electrical

10-1000MHz Frequency Range (Instantaneous) 70W Min (100W typical 10-500MHz) **Rated Output Power Output Power at 1dB Gain Compression** 60W Min (80W typical 10-500MHz) Gain Third Order Intercept Point (see note 1) 58dBm ±3dB Gain variation with Frequency **Harmonics at 60W Output Power** Better than -20dBc **Output Impedance** 50 Ohms Stability Unconditional Infinity:1 **Output VSWR Tolerance (see note 2) Input VSWR** 2:1 (Max) 85-264V ac **Supply Voltage Supply Frequency Range** 45-63Hz <500VA (Max) **Supply Power Mains Connector** IEC320

Mechanical

RF Connector Style

Safety Interlock

USB/GPIB Interface

Dimensions

19 inch, 4U Case, 550mm Deep

Mass

15kg

Operating Temperature Range

Case Style Options

Rack mount with Front or Rear panel connectors

Bench mount with Front panel connectors

Regulatory Compliance

Conducted and Radiated EmissionsEN61326 Class AConducted and Radiated ImmunityEN61326:1997 Table 1SafetyEN61010-1

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range





Designers and Manufacturers of Solid State RF and Microwave Amplifiers

Represented Worldwide

Vectawave Technology Ltd.
Unit D, The Apex,
St Cross Business Park, Monks Brook,
Newport, Isle of Wight, PO30 5XW

Tel: +44 (0) 1983 821 818 **Fax:** +44 (0) 1983 532 737 **E-mail:** sales@vectawave.co.uk