

VBA1000-250S

80 - 1000MHz 250W Amplifier

- Rugged push-pull Silicon LDMOS technology
- Class A for maximum mismatch drive
- General linear power requirements




The **VBA1000-250S** is an 80-1000MHz high power amplifier, designed primarily for EMC applications.

The amplifier produces around 300W P1dB at the important VHF frequencies, and is housed in a compact 4U case. VBA1000-250S is intended for applications where an 18V/m field is required and incorporates measures to improve power delivery into high VSWR loads.

The amplifier can be controlled from either the front panel or remote control via the Ethernet, USB and GPIB interfaces. The digital interface system manages enabling and disabling the amplifier, monitoring power levels, monitoring power supply health, communicating with the control computer and implementing electrical interlocks. The keypad and display interface is used for monitoring amplifier state, power levels, interlock states etc. and for configuration options.

Performance Chart

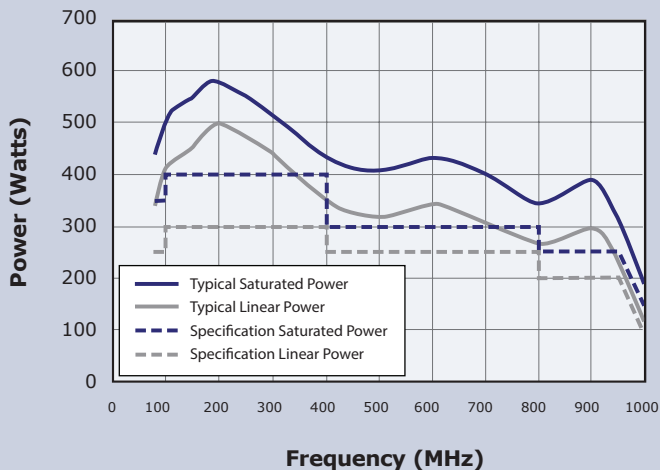

See overleaf for technical specification

Specifications

VBA1000-250S

Electrical

Frequency Range (Instantaneous)	80-1000MHz
Output Power at 3dB Gain Compression	350W 80MHz to 100MHz 400W 100MHz to 400MHz 300W 400MHz to 800MHz 250W 800MHz to 950MHz de-rating slope of 2.2W/MHz 950MHz to 1000MHz
Output Power at 1dB Gain Compression	250W 80MHz to 100MHz 300W 100MHz to 400MHz 250W 400MHz to 800MHz 200W 800MHz to 950MHz de-rating slope of 2.2W/MHz 950MHz to 1000MHz
Gain	56dB Min
Third Order Intercept Point (see note 1)	64dBm
Gain variation with Frequency	±3dB
Harmonics at P1dB Output Power	Better than -20dBc
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	2:1 (Max)
Supply Voltage	100 - 240V ac (+/- 10%)
Supply Frequency Range	45-63Hz
Supply Power	<1kVA (Max)
Mains Connector	IEC320

Mechanical

RF Connector Style	Type N Female
Safety Interlock	Dual input, S/C and/or O/C to Mute
Remote Control Interface	USB/GPIB/Ethernet
Dimensions	19 inch, 4U Case, 500mm deep
Mass	18kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors

Regulatory Compliance

Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:2013 Table 1
Safety	EN61010-1

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range



Represented Worldwide

Vectawave Technology Ltd.
Unit D, The Apex,
St Cross Business Park, Monks Brook,
Newport, Isle of Wight, PO30 5XW

Tel: +44 (0) 1983 821 818

E-mail: sales@vectawave.co.uk